

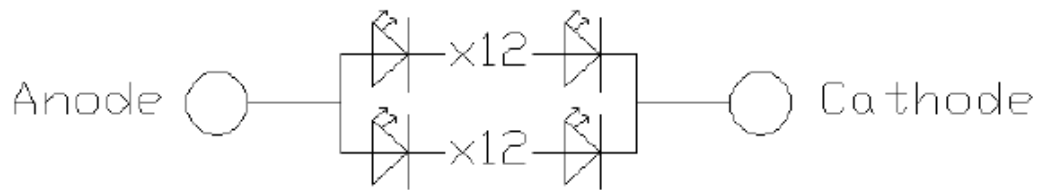



Kod produktu	Wymiary	Moc	Napięcie	Prąd	TC(K)	Lumen/CRI
XC1311-H1002	13.5*13.5* 1.7mm	10W	29-31V	300MA	6000K 5000K 4000K 3500K 3000K 2700K	130-140LM/W CRI>80
XC1311-H1202		7-12W	35-37V	180-300MA		
XC1311-H1502		15W	44-46V	300MA		
XC1311-H1802		18W	53-55V	300MA		
XC1311-H1803			35-37V	450MA		
XC1311-H1204		20-24W	35-37V	500-600MA		

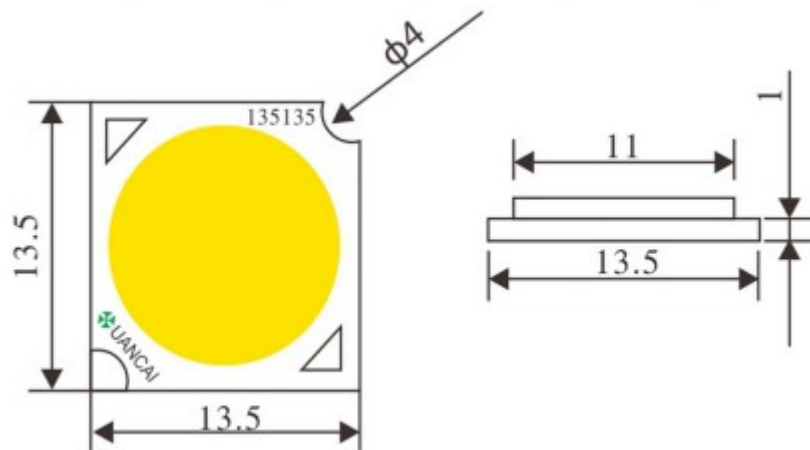


Internal Circuit

x-y chart CIE1931

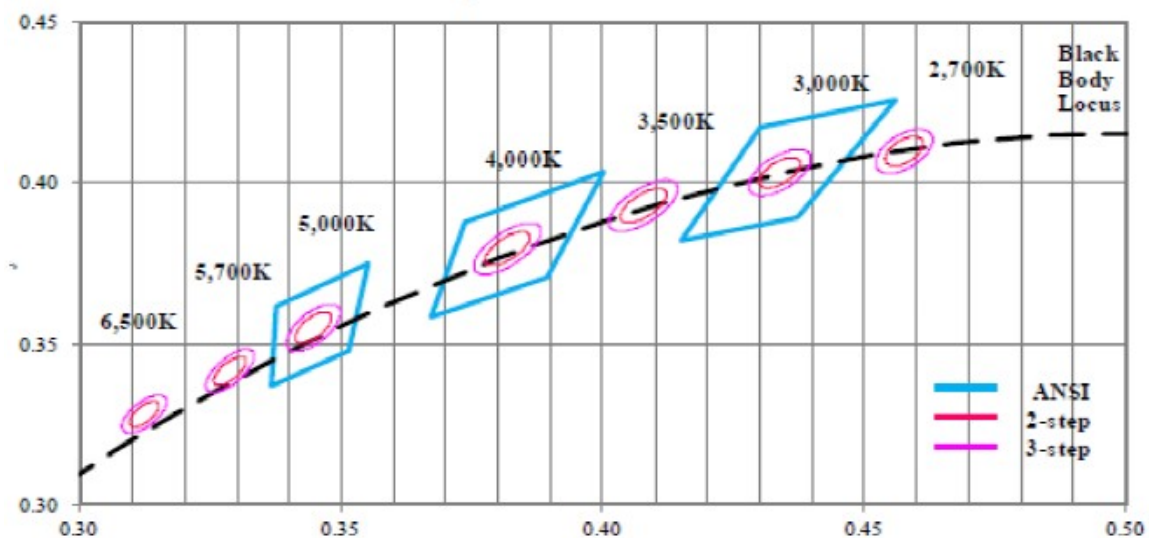


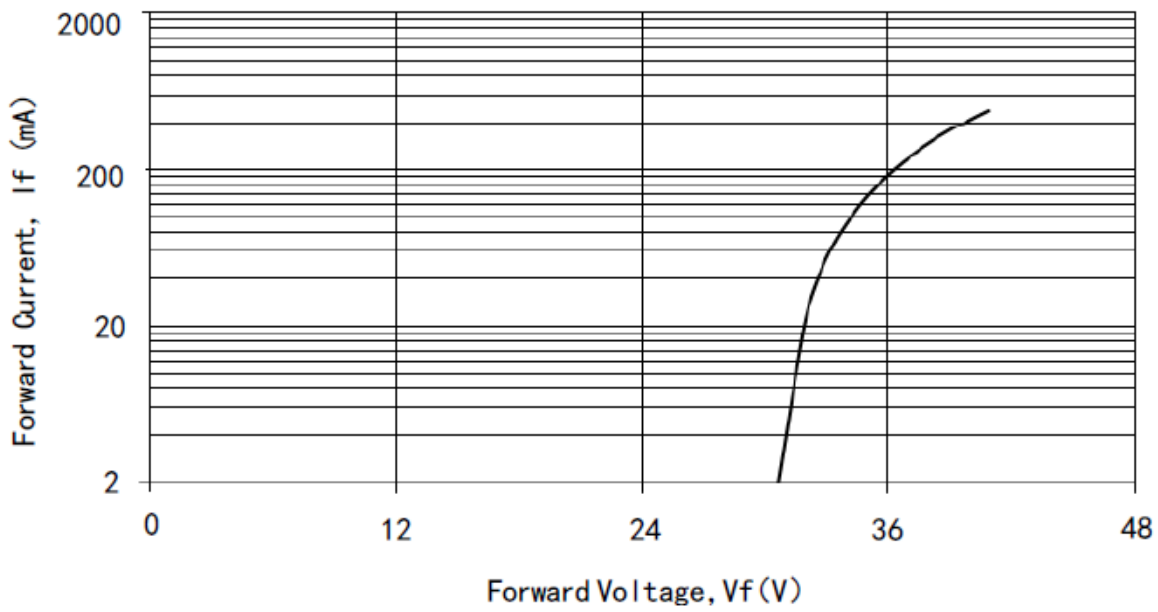


Forward Current vs. Forward Voltage ($T_c=25^\circ\text{C}$) |

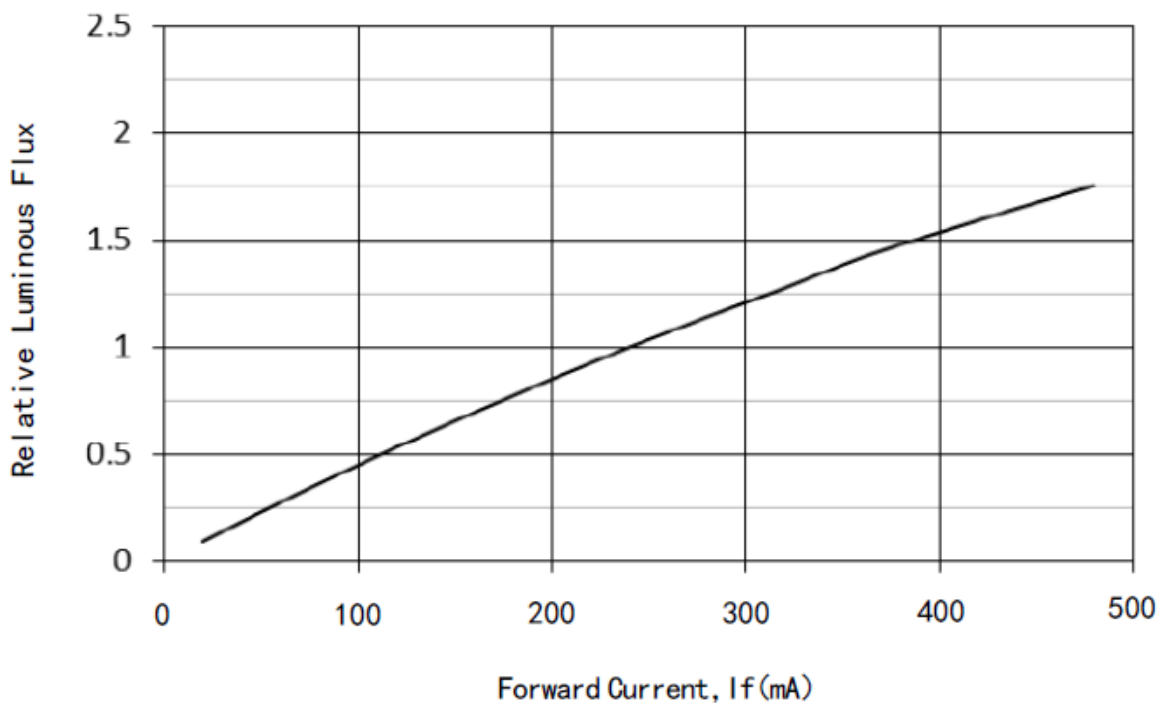

Forward Current vs. Relative Luminous Flux ($T_c=25^\circ\text{C}$)

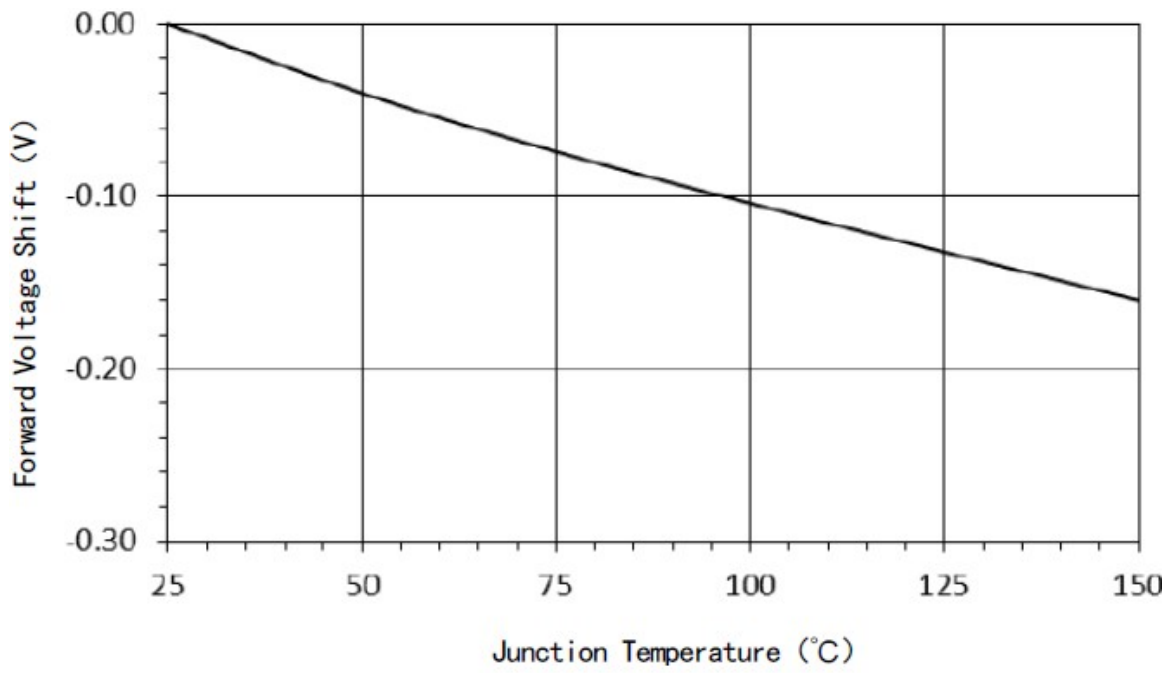

Forward Current Shift vs. Junction Temperature

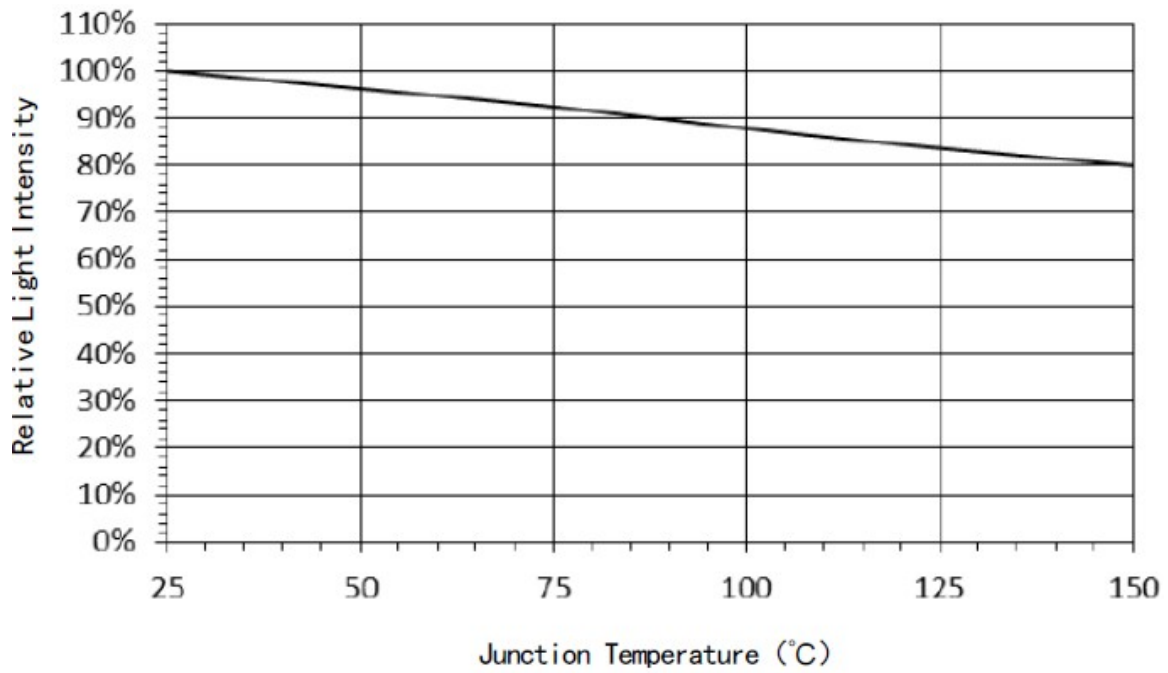

Relative Light Intensity vs. Junction Temperature